


NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

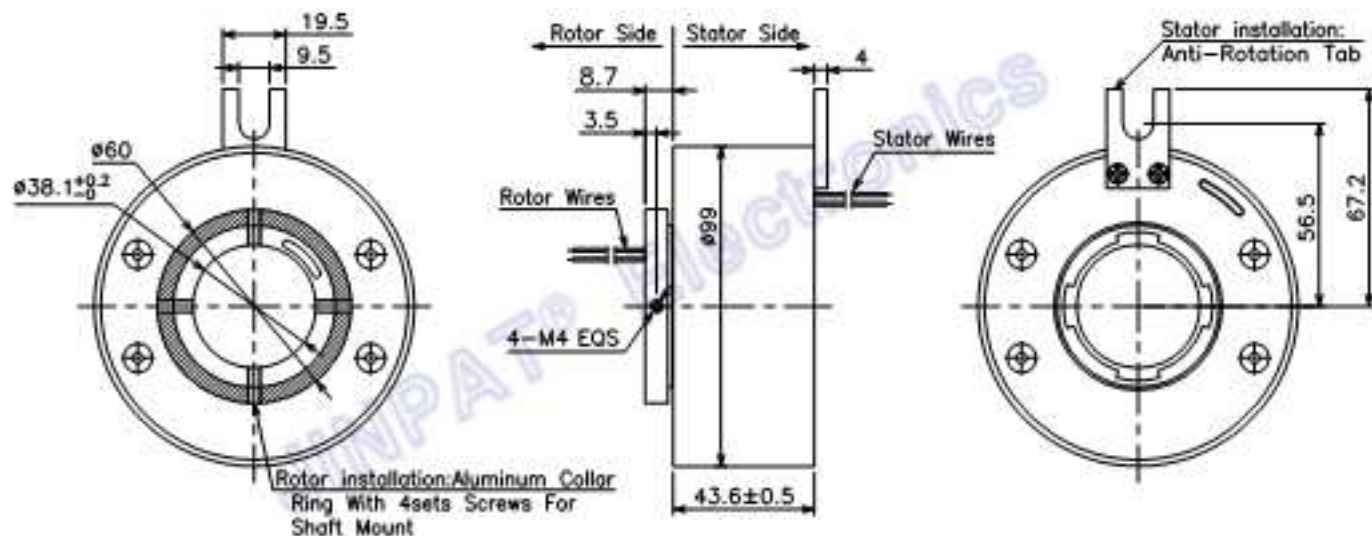


JINPAT  
www.slpring.cn

MODEL	LPT038-0605						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DL UNITS SPECIFIED	DESIGN	HFM	DATE	2018.08.31	
SCALE	1:1	LINE 1-18-02 02.12 1-8-20 02.2 1-12-02 02.2	CHECKED	LML	DATE	2018.08.31	
PROJ.	◆	NO.7	REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
6Circuits \* 5A(240VAC)  
|  
AWG22# Teflon® UL

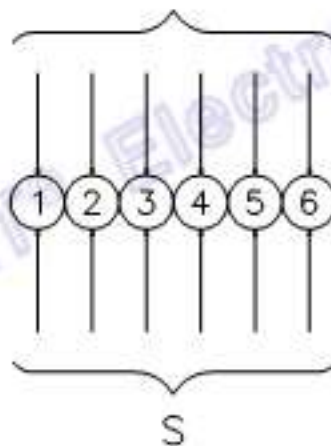


Electronic & Electric		Mechanical		
Circuits	Total	6 Ckt	Working Speed	0-300rpm
	Detail	6Pin	Inner Diameter	435.1mm
Rating Voltage	240V AC/50	Contact Material	Preious Metal	
Dielectric Strength	1000VAC@50Hz	Housing Material	Aluminum Alloy	
Insulation Resistance	>300MΩ@50VDC	Lead Wire Length	Station:300mm Relem:300mm	
Environment		Remarks		
Working Temperature	-20°C~+80°C	Other	/	
Working Humidity	CA25RH			

  
JINPAT  
www.slipring.cn



MODEL	LPT038-0605					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	ALL UNITS SPECIFIED IN MM	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	1-18 18.1 19-20 20.1 21-22 22.2 23-24 24.2 25-26 26.2 27-28 28.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

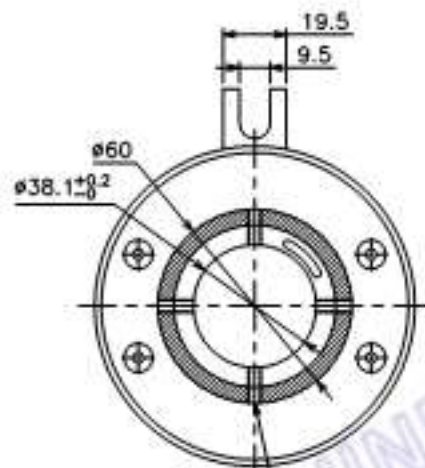

Rotor installation: Aluminum Collar Ring With 4 sets Screws For Shaft Mount

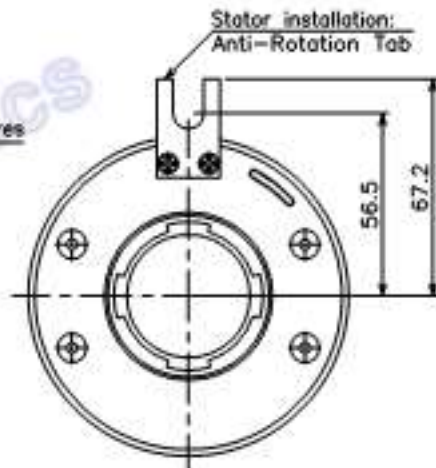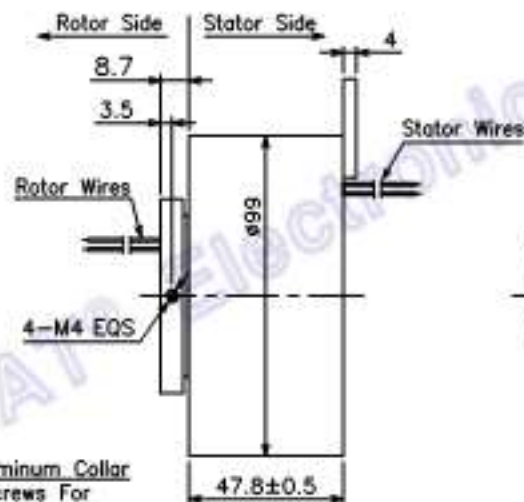

Stator installation: Anti-Rotation Tab




JINPAT  
www.slipring.cn

MODEL	LPT038-0610						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	NO. SHEETS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	1-18 19.1 19-20 22.1 21-22 22.2 23-24 22.3 25-26 22.4 27-28 22.5 29-30 22.6 31-32 22.7	CHECKED	LWL	DATE	2018.08.31	
PROJ.	◆	REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
6Circuits \* 10A(240VAC)  
|  
AWG17# Teflon® UL

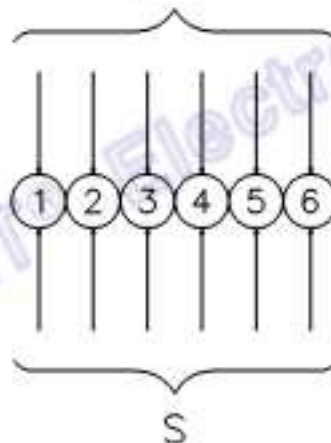


Electronic & Electric			Mechanical	
Circuits	Total	6 Ckt	Working Speed	0~300rpm
	Detail	6x10A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preious Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+60°C		Other	/
Working Humidity	≤85%RH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-0610					
Customer code	/		TITLE	Wiring Diagram		
LWT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	UNITS 6---10 IN.1 10---20 IN.1.2 20---30 IN.2 30---40 IN.2 40---50 IN.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

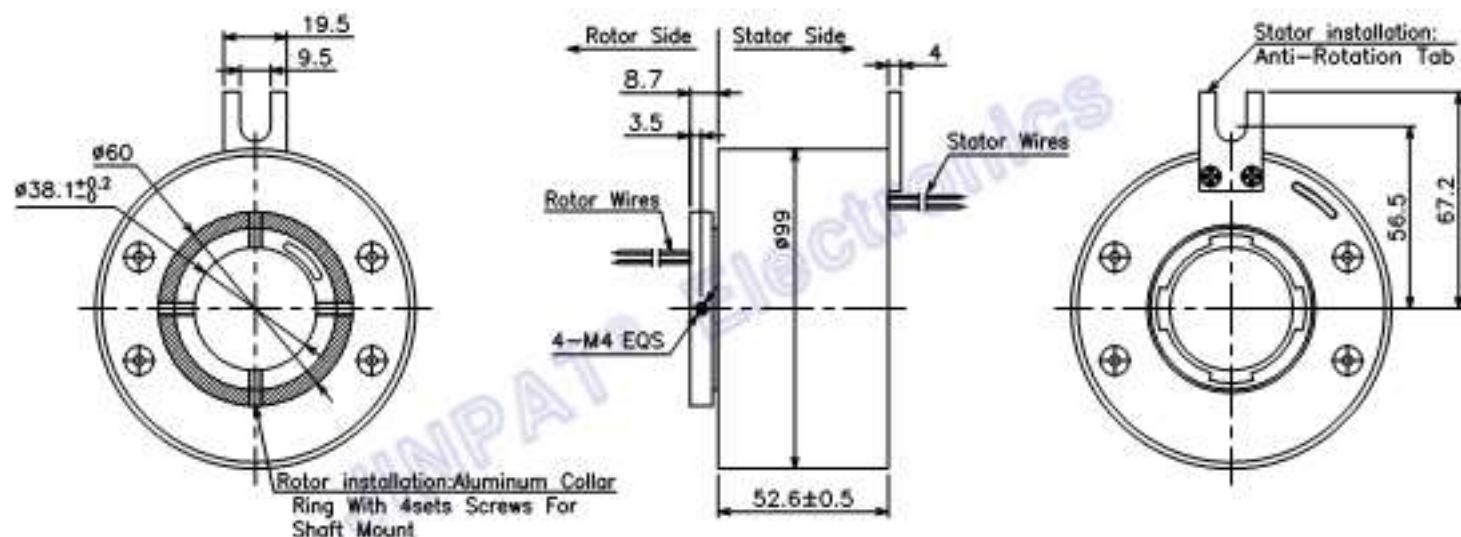

JINPAT  
www.slipring.cn


MODEL	LPT038-0615						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	NO. WIRE SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	LINE	CHECKED	LWL	DATE	2018.08.31	
PROJ.		NO. 1	REV.	AG	PAGE	1/2	



NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
6Circuits \* 15A(240VAC)  
|  
AWG14# Teflon® UL

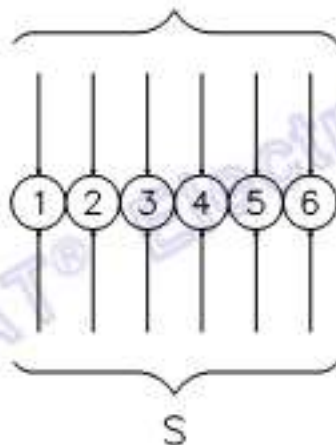


Electronic & Electric			Mechanical	
Circuits	Total	6 Ckt	Working Speed	0~300rpm
	Detail	6/15A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preform Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-0615					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	PL UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	9-19 05.1 10-20 02.10 105-20 02.2 105.2 05.7	CHECKED	LWL	DATE	2018.08.31
PROJ.			REV.	AG	PAGE	1/2

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

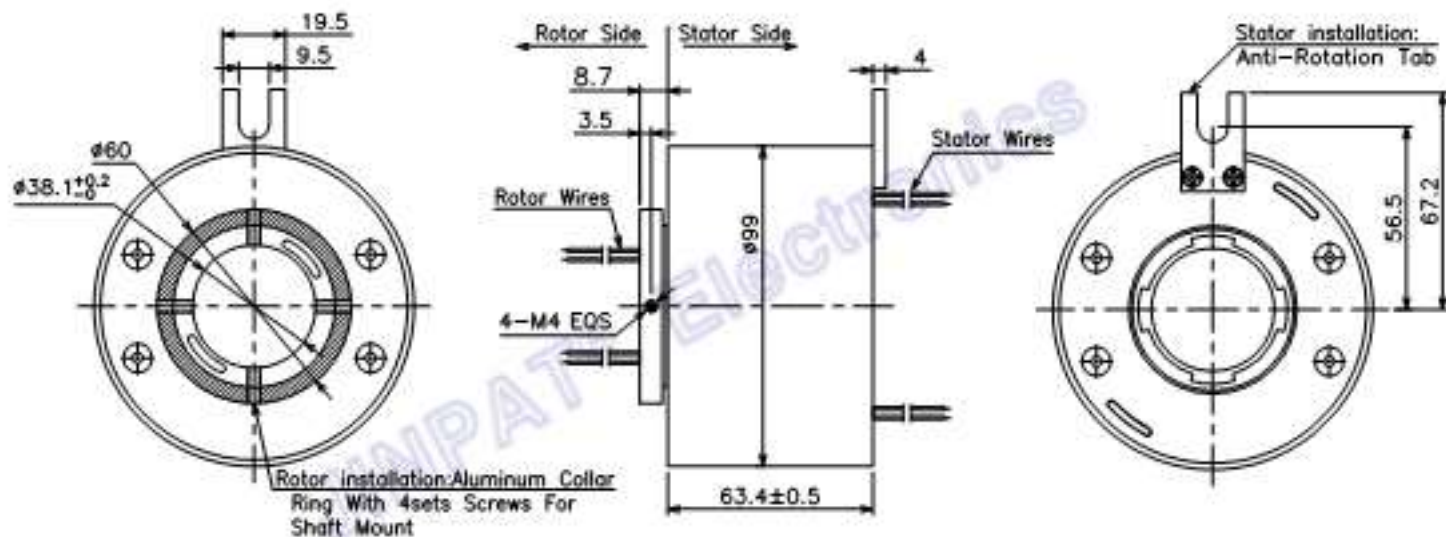


JINPAT  
www.slipring.cn

MODEL	LPT038-1205						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.	◆	REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
12Circuits \* 5A(240VAC)  
|  
AWG22# Teflon® UL

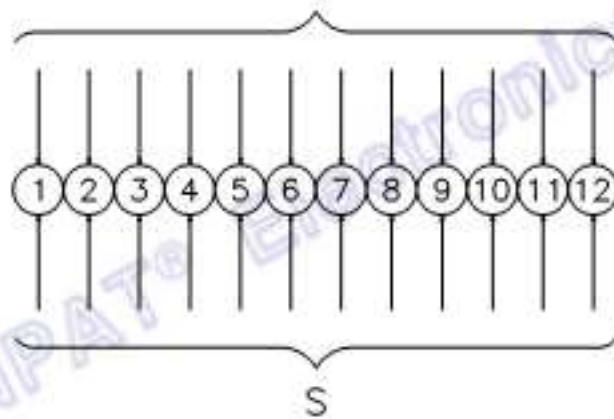

Electronic & Electric			Mechanical	
Circuits	Total	12 Ckt	Working Speed	0~300rpm
	Detail	12x4	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preform Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			


  
JINPAT  
www.slipring.cn

MODEL	LPT038-1205						
Customer code	/		TITLE	Wiring Diagram			
UNIT	mm	PL UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	UNITS 9-19 95.1 10-20 95.2 10-20 95.2 10-20 95.2	CHECKED	LWL	DATE	2018.08.31	
PROJ.		REV.	AG	PAGE	1/2		



NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

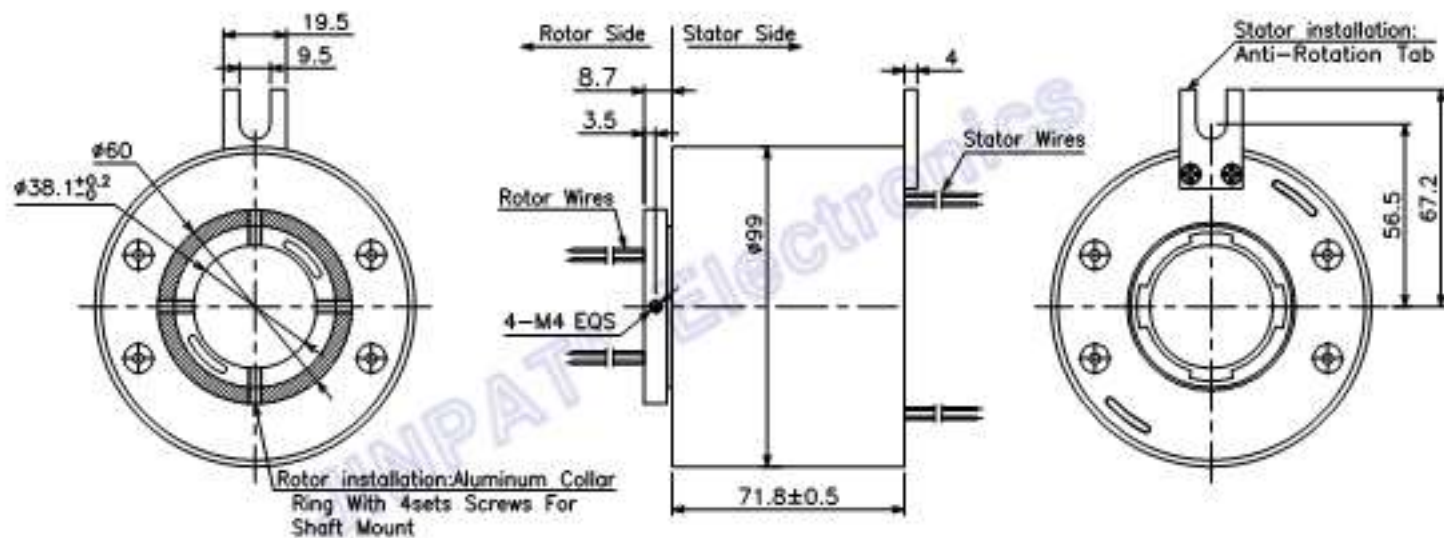


JINPAT  
www.slipring.cn

MODEL	LPT038-1210						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.		REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
12Circuits \* 10A(240VAC)  
|  
AWG17# Teflon® UL

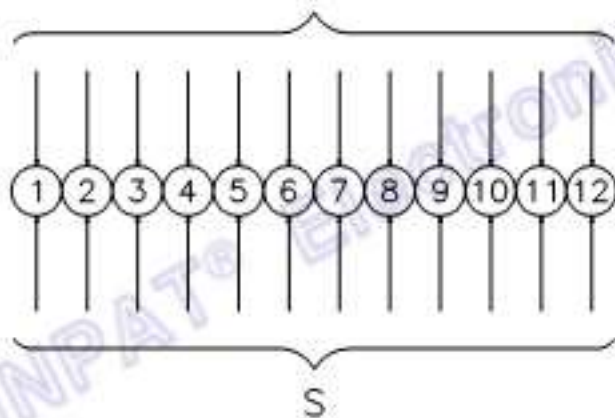


Electronic & Electric			Mechanical	
Circuits	Total	12 CIR	Working Speed	0~300rpm
	Detail	12x10A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preform Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-1210					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	9-19 95.1 10-19 95.1 10-20 95.2 10-21 95.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		95.2	REV.	AG	PAGE	1/2

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

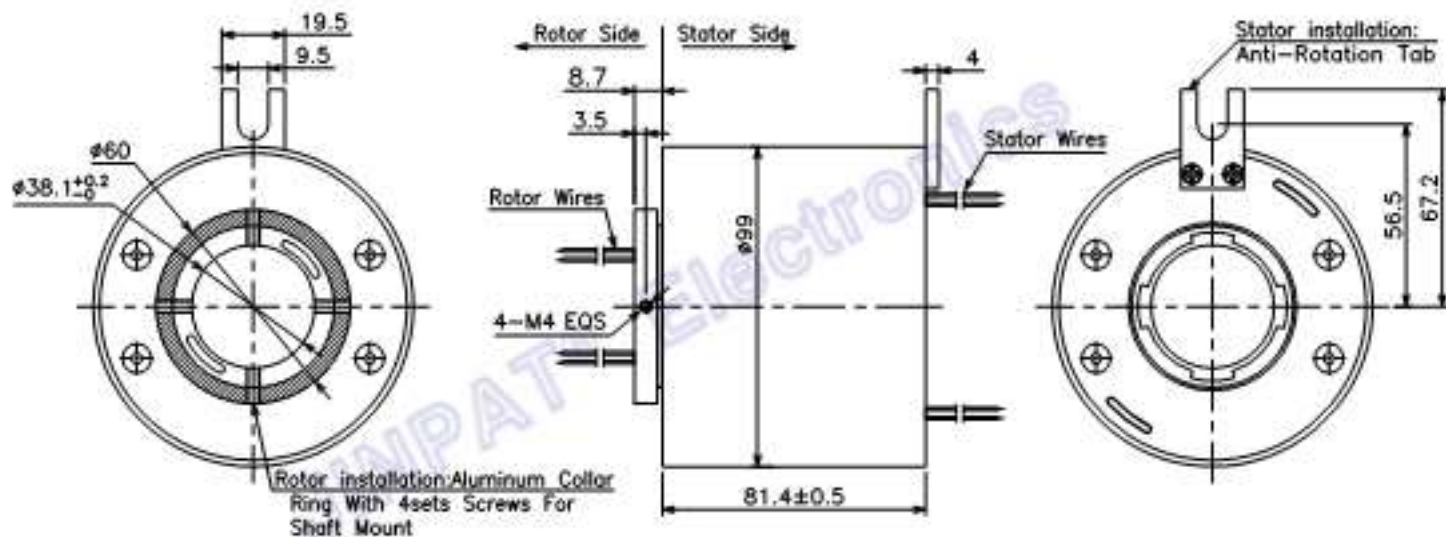


JINPAT  
www.slipring.cn

MODEL	LPT038-1215						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.	◆	REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
12Circuits \* 15A(240VAC)  
|  
AWG14# Teflon® UL

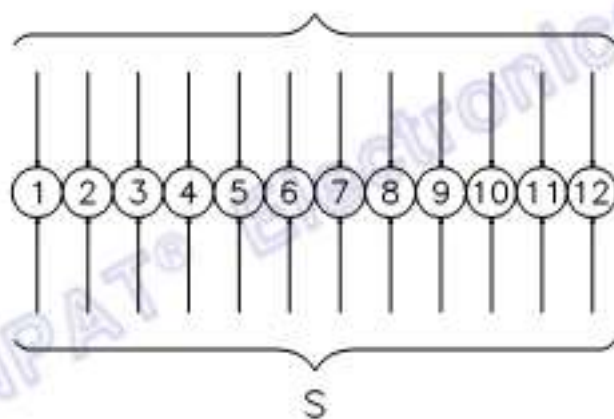


Electronic & Electric			Mechanical	
Circuits	Total	12 CIR	Working Speed	0~300rpm
	Detail	12x15A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preform Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			

  
**JINPAT**  
[www.slipring.cn](http://www.slipring.cn)

MODEL	LPT038-1215					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	NO. WIRE SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	<small>           1-19 15.1            20-30 15.2            31-40 15.3            41-50 15.4            51-60 15.5            61-70 15.6            71-80 15.7         </small>	CHECKED	LWL	DATE	2018.08.31
PROJ.		REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

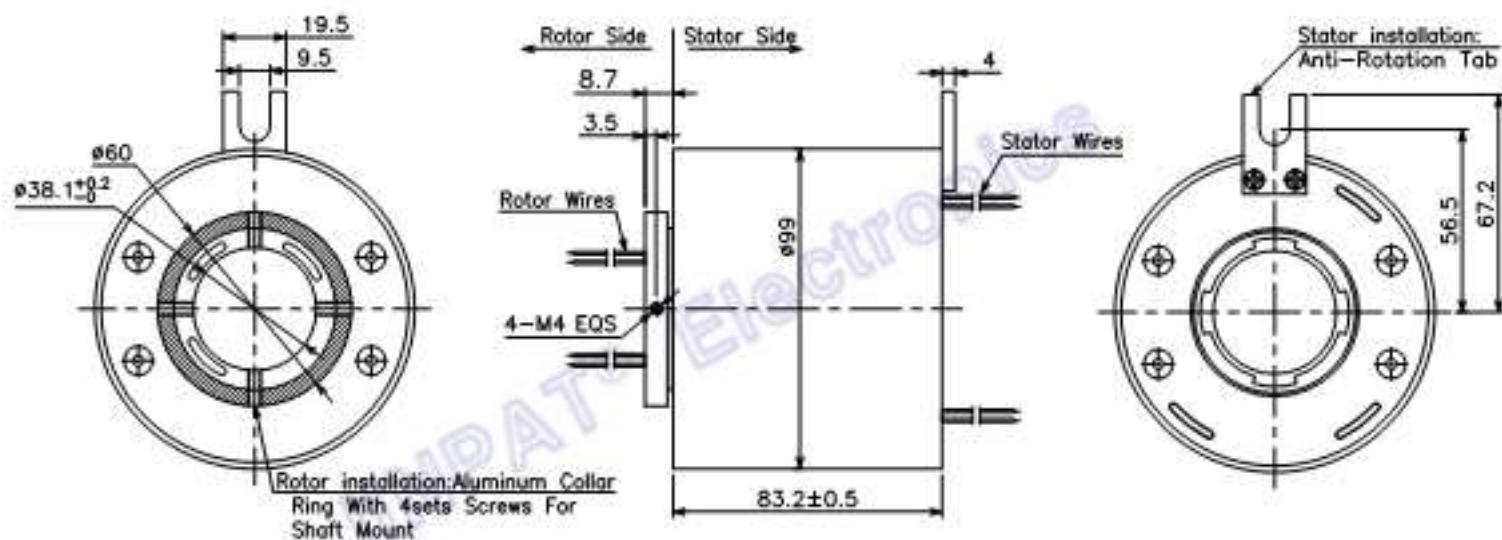

JINPAT  
www.slipring.cn


MODEL	LPT038-1805						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.	◆	REV.	AG	PAGE	1/2		



NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
18Circuits \* 5A(240VAC)  
|  
AWG22# Teflon® UL

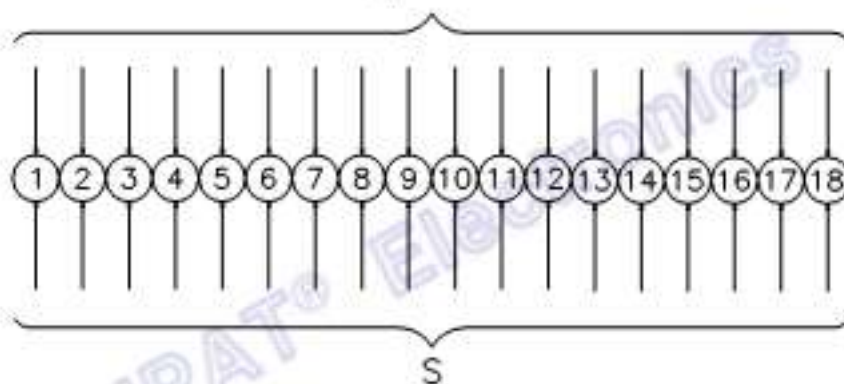


Electronic & Electric		Mechanical		
Circuits	Total	18 CIR	Working Speed	0~300rpm
	Detail	18x5A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50	Contact Material	Precious Metal	
Dielectric Strength	1000VAC@50Hz	Housing Material	Aluminum Alloy	
Insulation Resistance	>300MΩ@50V/50°C	Lead Wire Length	Station:300mm Reborn:300mm	
Environment		Remarks		
Working Temperature	-20°C~+80°C	Other	/	
Working Humidity	CA65RH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-1805					
Customer code	/		TITLE	Wiring Diagram		
LWT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	0-10 10-20 20-30 30-40 40-50 50-60 60-70 70-80 80-90 90-100	CHECKED	LWL	DATE	2018.08.31
PROJ.		REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

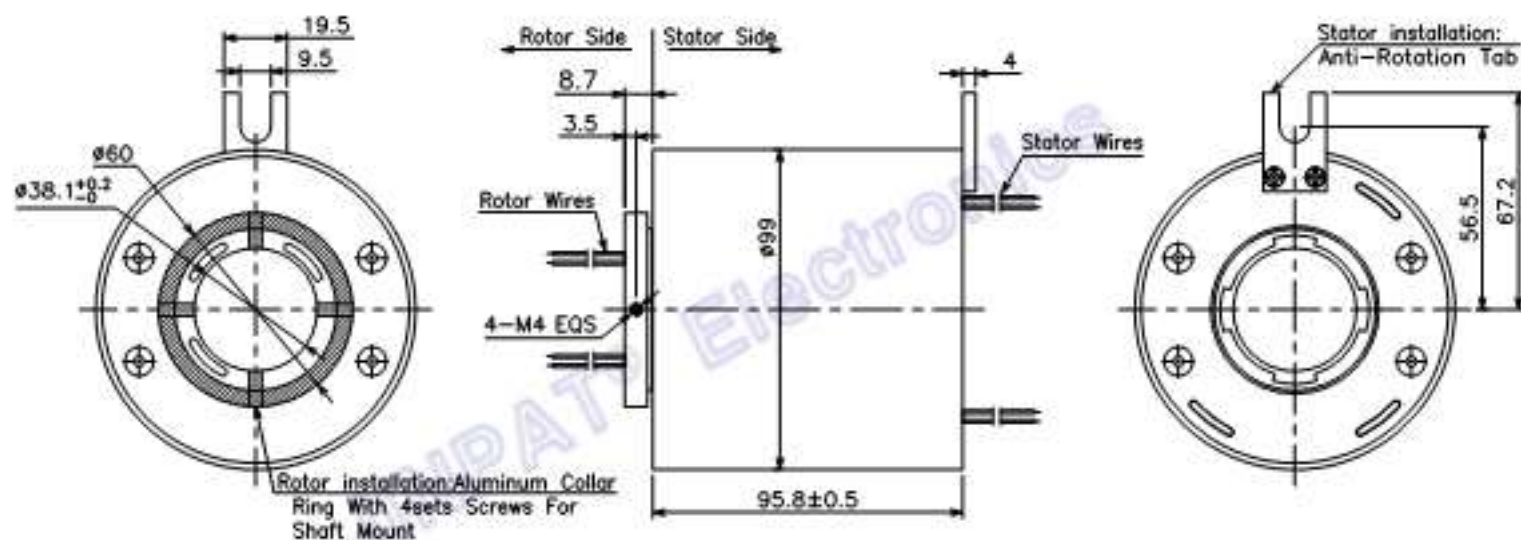


JINPAT  
www.slipring.cn

MODEL	LPT038-1810						
Customer code	/		TITLE	Outline Drawing			
UNIT	mm	NO. SHEETS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	1-18 01.1 19-20 02.1 21-22 03.1 23-24 04.1 25-26 05.1 27-28 06.1 29-30 07.1	CHECKED	LWL	DATE	2018.08.31	
PROJ.	◆	NO. 7	REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
18Circuits \* 10A(240VAC)  
|  
AWG17# Teflon® UL

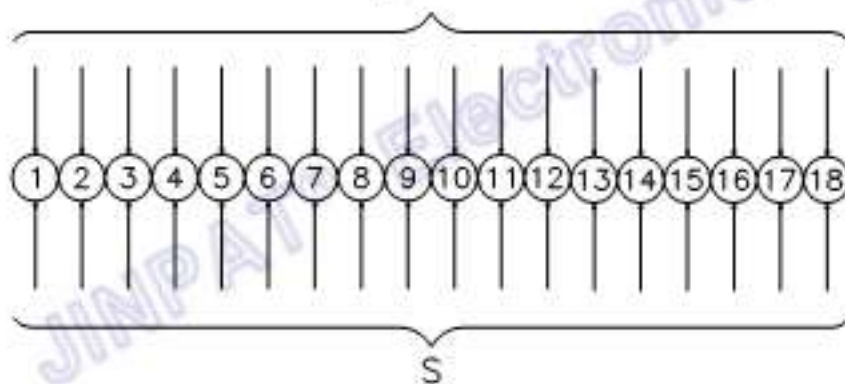


Electronic & Electric			Mechanical	
Circuits	Total	18 CIR	Working Speed	0~300rpm
	Detail	18x10A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preious Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Relem:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-1810						
Customer code	/		TITLE	Wiring Diagram			
LWT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	9-19 05.1 10-20 02.10 10-20 02.2 10-20 02.2	CHECKED	LWL	DATE	2018.08.31	
PROJ.		REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

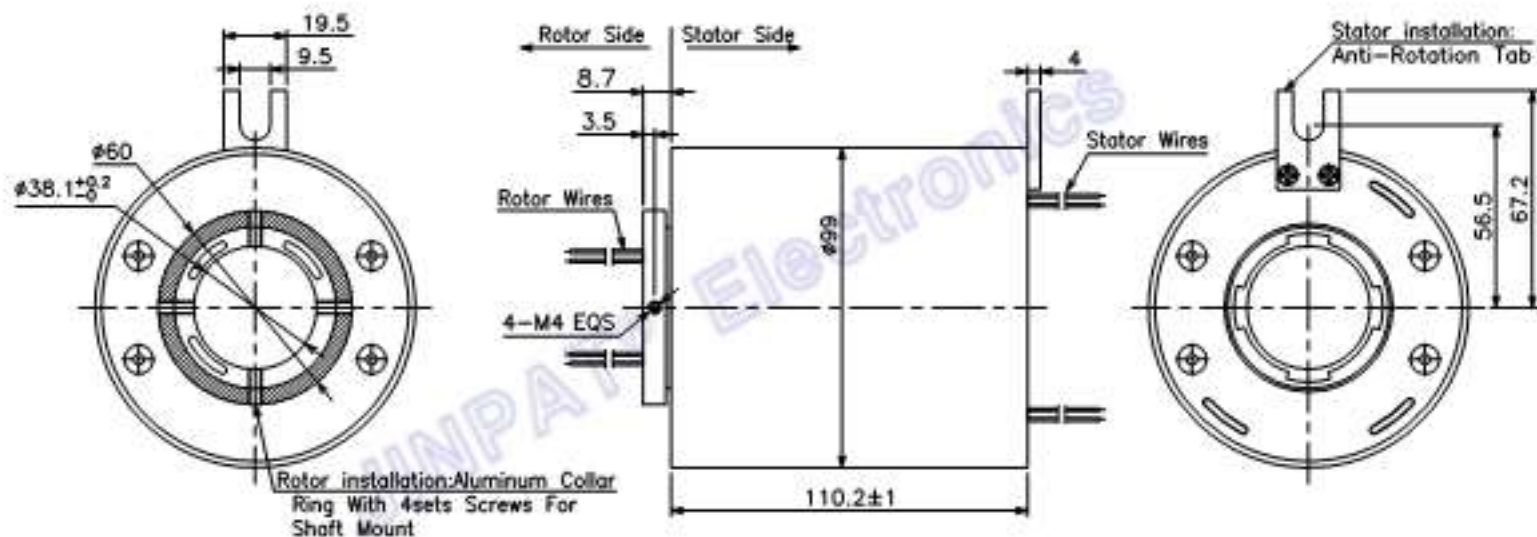


JINPAT  
www.slipring.cn

MODEL	LPT038-1815						
Customer code	/		TITLE	Outline Drawing			
UNIT	mm	UNLESS SPECIFIED	DESIGN	HFM	DATE	2018.08.31	
SCALE	1:1	UNLESS SPECIFIED	CHECKED	LML	DATE	2018.08.31	
PROJ.		UNLESS SPECIFIED	REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
18Circuits \* 15A(240VAC)  
|  
AWG14# Teflon® UL

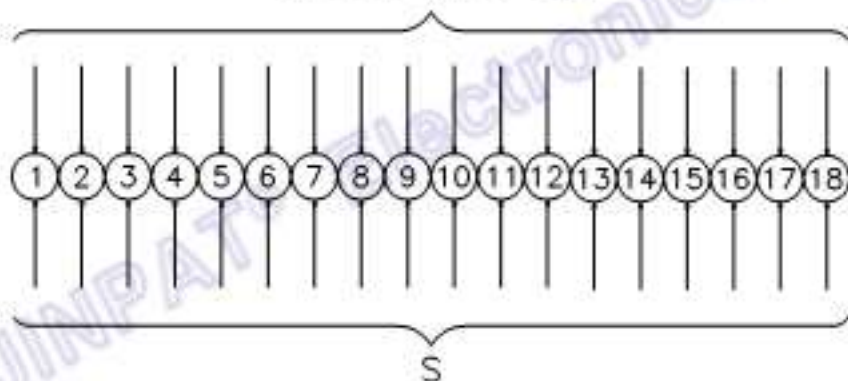

Electronic & Electric			Mechanical	
Circuits	Total	18 CIR	Working Speed	0~300rpm
	Detail	18x15A	Inner Diameter	435.1mm
Rating Voltage	240V AC/3C		Contact Material	Preious Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Rebin:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			


  
JINPAT  
www.slipring.cn

MODEL	LPT038-1815					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	ALL UNITS SPECIFIED IN MM	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	1-18 45.1 19-22 45.1 23-26 45.2 27-30 45.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		45.2	REV.	AG	PAGE	1/2



NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

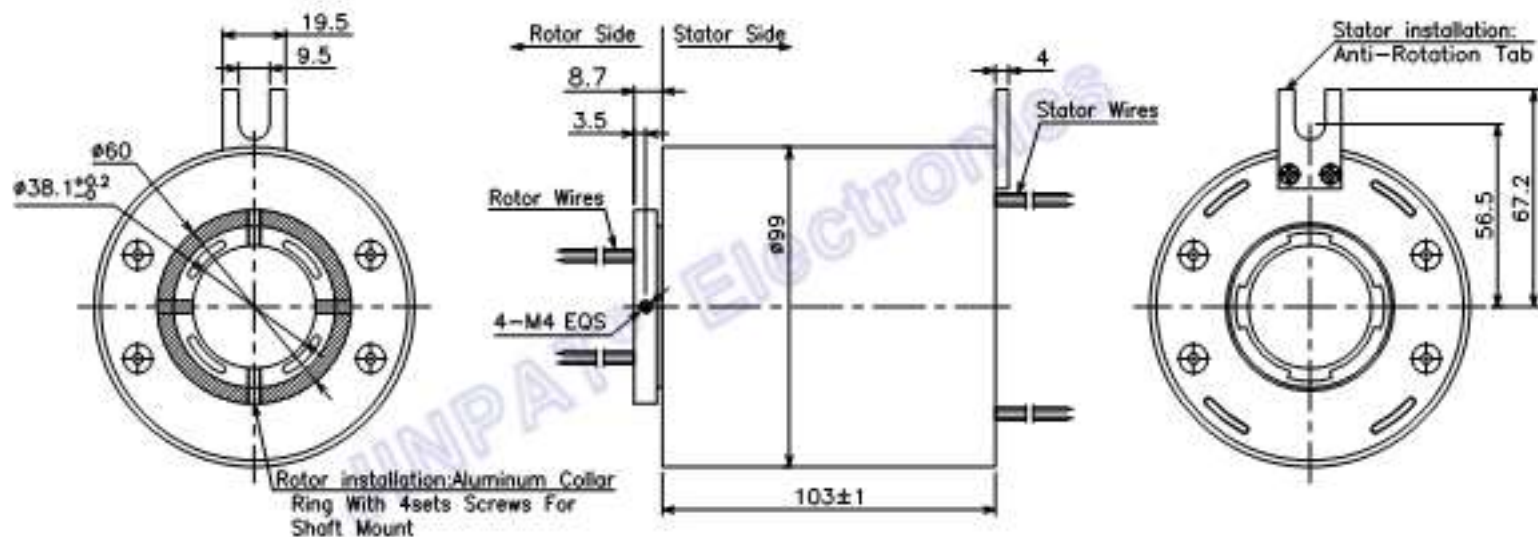


JINPAT  
www.slipring.cn

MODEL	LPT038-2405						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	NO. SHEETS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	DESIGNER	CHECKED	LWL	DATE	2018.08.31	
PROJ.	◆	NO. 7	REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
24Circuits \* 5A(240VAC)  
|  
AWG22# Teflon® UL

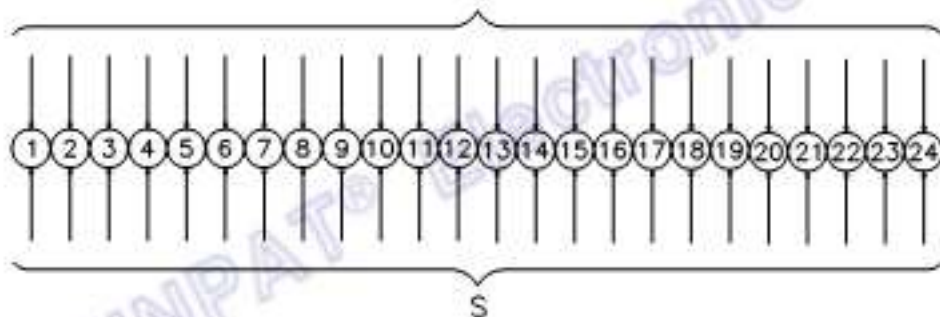


Electronic & Electric			Mechanical	
Circuits	Total	24 CRT	Working Speed	0~300rpm
	Detail	24x5A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preform Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	CASRH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-2405						
Customer code	/		TITLE	Wiring Diagram			
UNIT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31	
SCALE	1:1	9--19 45.1 10--20 45.1 10--20 45.2 10--20 45.2	CHECKED	LWL	DATE	2018.08.31	
PROJ.		REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

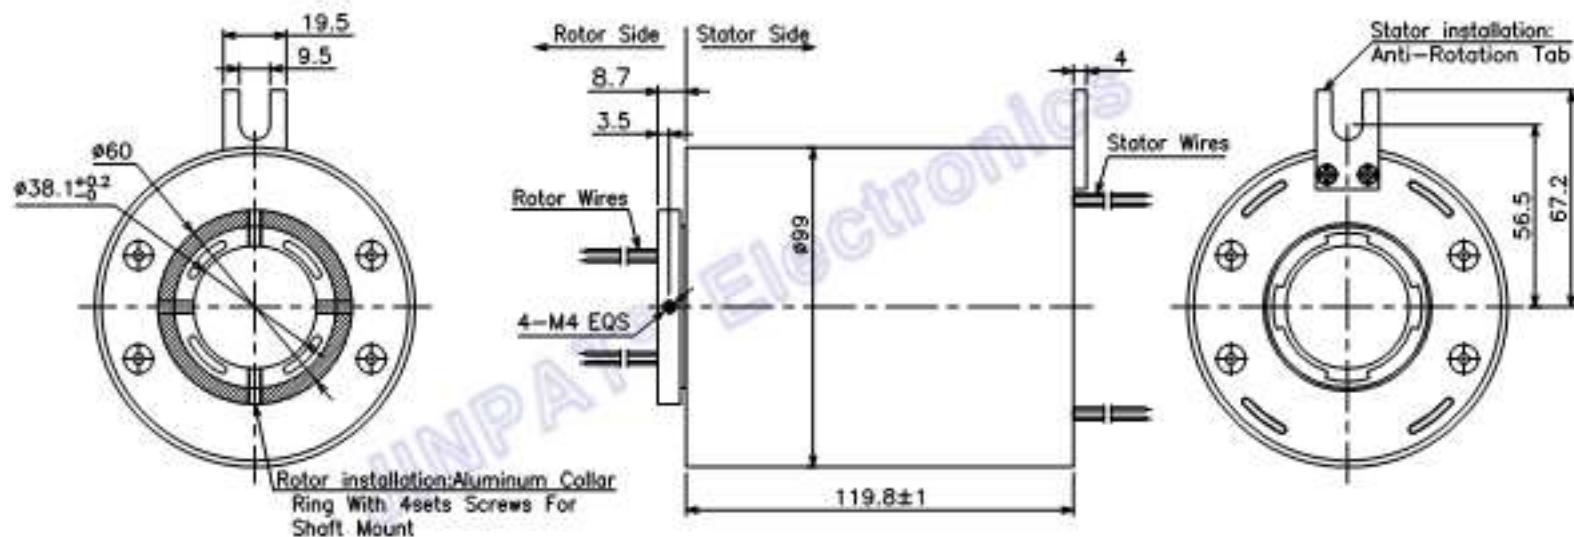


JINPAT  
www.slipring.cn

MODEL	LPT038-2410						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.	◆	REV.	AG	PAGE	1/2		

NO.	CONTENT OF AMENDMENT	DATE	BY


This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

R  
24Circuits \* 10A(240VAC)  
|  
AWG17# Teflon® UL

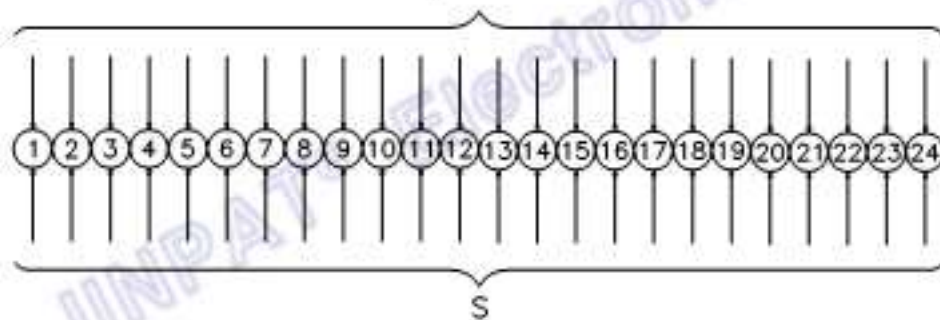


Electronic & Electric			Mechanical	
Circuits	Total	24 CRT	Working Speed	0~300rpm
	Detail	3in10A	Inner Diameter	435.1mm
Rating Voltage	240V AC/50		Contact Material	Preious Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	40%RH			

  
JINPAT  
www.slipring.cn

MODEL	LPT038-2410					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	PL. UNITS SPECIFIED	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	UNITS 1-18 10.1 19-20 10.1 21-22 10.2 23-24 10.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		REV.	AG	PAGE	1/2	

NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

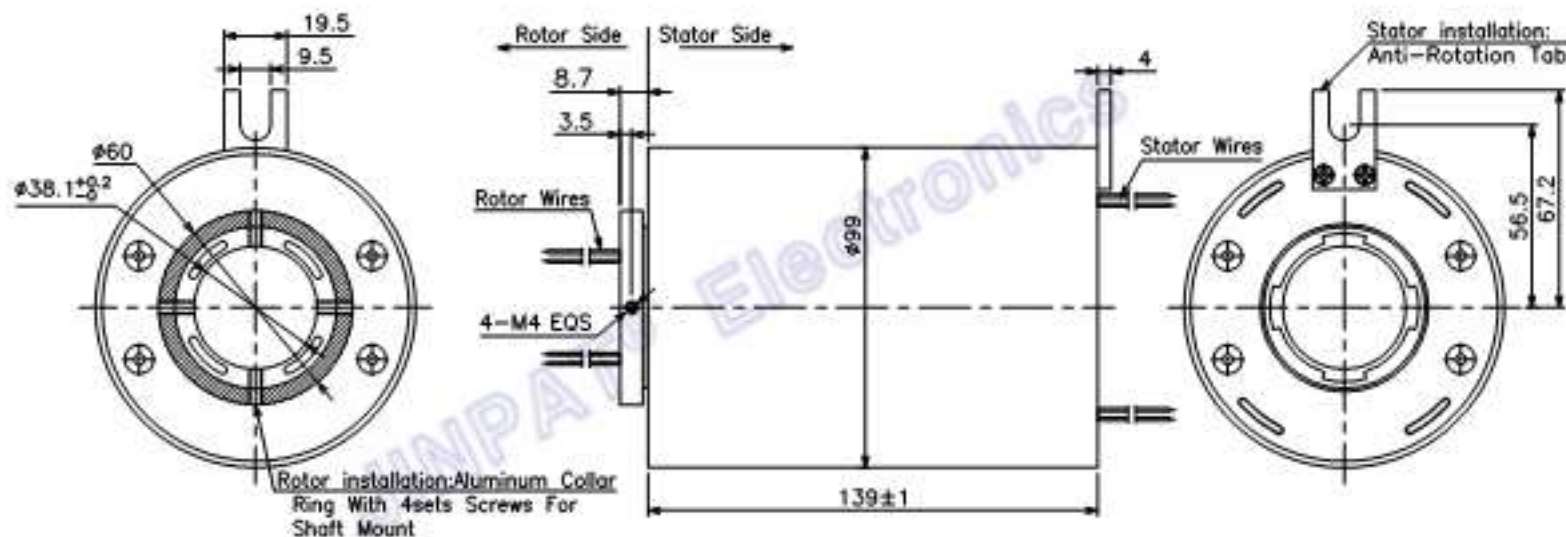


JINPAT  
www.slpring.cn

MODEL	LPT038-2415						
Customer code	/	TITLE	Outline Drawing				
UNIT	mm	DESIGN	HW	DATE	2018.08.31		
SCALE	1:1	CHECKED	LWL	DATE	2018.08.31		
PROJ.	◆	REV.	AG	PAGE	1/2		



NO.	CONTENT OF AMENDMENT	DATE	BY

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets propriety to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.  
COPY RIGHT © 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

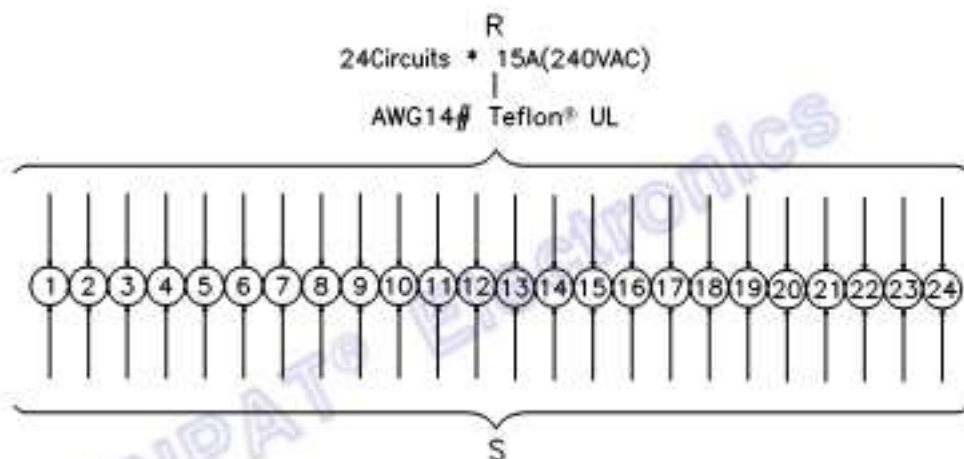

Electronic & Electric			Mechanical	
Circuits	Total	24 CIR	Working Speed	0~300rpm
	Detail	24x15A	Inner Diameter	435.1mm
Rating Voltage	240V AC/3C		Contact Material	Preious Metal
Dielectric Strength	1000VAC@50Hz		Housing Material	Aluminum Alloy
Insulation Resistance	≥300MΩ@50VDC		Lead Wire Length	Station:300mm Reborn:300mm
Environment			Remarks	
Working Temperature	-20°C~+80°C		Other	/
Working Humidity	40%RH			

  
**JINPAT**  
 www.slipring.cn

MODEL	LPT038-2415					
Customer code	/		TITLE	Wiring Diagram		
UNIT	mm	ALL UNITS SPECIFIED IN MM	DESIGN	HW	DATE	2018.08.31
SCALE	1:1	1-18 04.1 1-19 04.1 1-20 04.2 1-21 04.2 1-22 04.2 1-23 04.2 1-24 04.2	CHECKED	LWL	DATE	2018.08.31
PROJ.		NO.7	REV.	AG	PAGE	1/2