
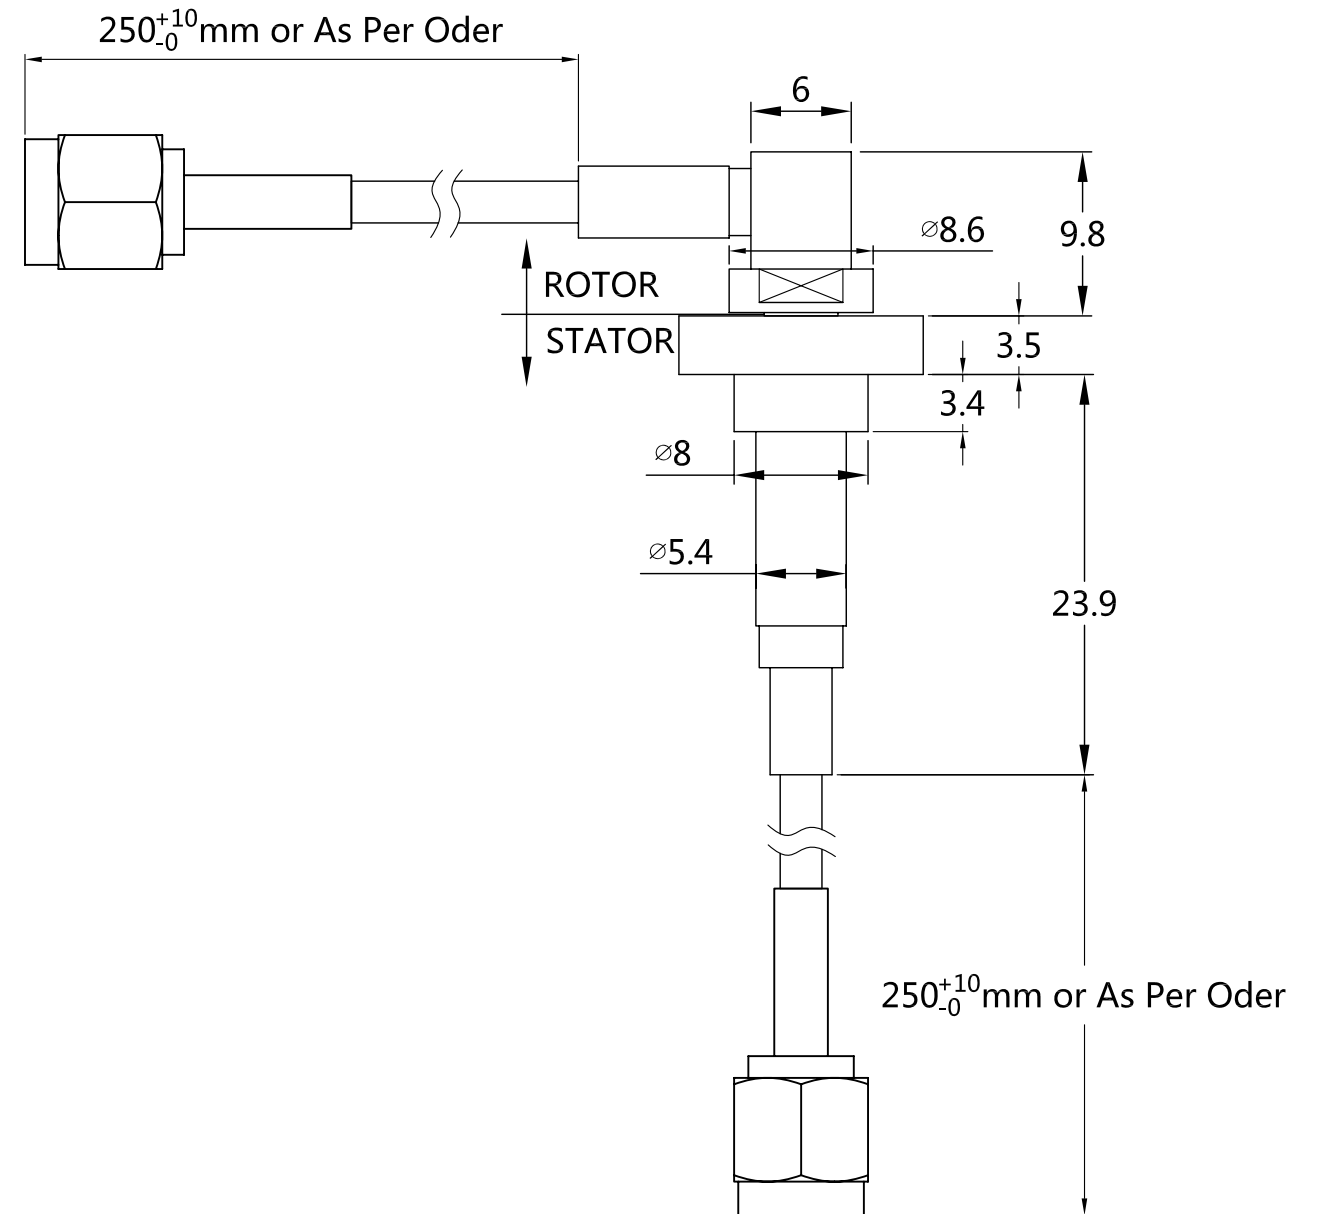




MARK	CONTENT OF MENDMENT	DATE	DRAW

This document is the property of JINPAT Electronics Co., Ltd (ShenZhen) (Hereafter "JINPAT"). It is lent and is to be returned upon request. The contents of this document are confidential and constitute trade secrets proprietary to JINPAT. Its contents document nor its contents shall be disclosed to any unauthorized person copied or published without JINPAT prior written consent.
COPY RIGHT @ 2018 JINPAT ELECTRONICS Co., Ltd (ShenZhen).

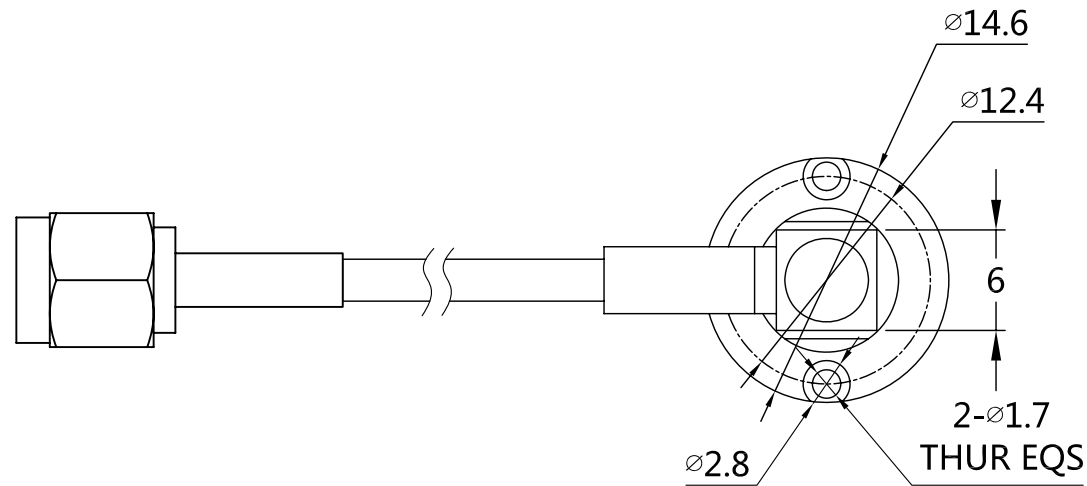

Specifications

Interface Type	SMA/MCX/SMB/N/other	Axial Load On Interface, Max	±2N
Frequency Range	DC-3GHz	Radial Load On Interface, Max.	±2N
Impedance	50 Ohm	Body Material	Nickel-plated brass
Cable Length	250mm/250mm(or As Per Order)	Insulator Material	PTFE
VSWR, Max.	1.6	Marking	Adhesive Label
VSWR WOW	0.1	Weight	11.5g(Without Cable)
Insertion Loss, Max.	0.4dB(Without Cable) 1.4dB@250/250mm	IP Protection Level	IP40
Insertion Loss WOW	0.1dB	Operation Temperature	-45 ~ +80°C
Peak Power, Max.	1000W	Storage Temperature	-55 ~ +85°C
Average Power, Max.	20W	Humidity (Operation)	95%
Phase WOW,Max	1°	Humidity (Storage)	95%
Rotating Speed, Max.	80rpm	Starting Torque	2Ncm Max
Life Time, Min.	2 Million Revolutions	Continuous Rotational Torque	2Ncm Max

 JINPAT www.slipring.cn	型号 MODEL	LPCC-02A						
	客户编码 Customer code	/			名称 TITLE	Outline Drawing		
	单位 UNIT	mm	TOL UNLESS SPECIFIED LINEAR 0--18 ±0.1 >18--80 ±0.15 >80--250 ±0.2 ANGLE x° ±0.5°	设计 DESIGN	GMH	日期 DATE	2018.9.17	
	比例 SCALE	1:1		审核 CHECKED	CRJ	日期 DATE	2018.9.17	
	视角 PROJ.			版本 REV.	A0	页码 PAGE	1/1	