


High Frequency Phase-stable Low Loss Coaxial Cable Series,
High Frequency Cable Auxiliaries
and High Frequency Test Cable Auxiliaries are broadly
applied in aerospace industry,
Electronic countermeasures system(ECM),
high frequency anechoic system connection and 5G mobile
communication, etc..

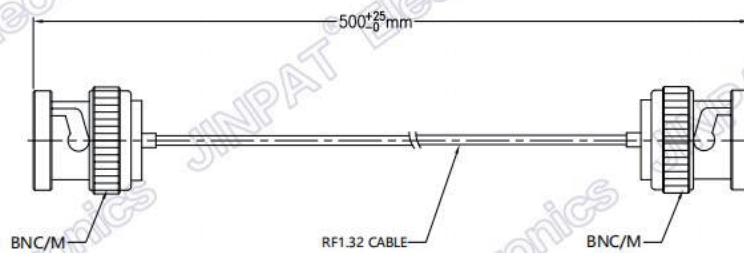

Product specification

Product specification			
Interface Type	BNC-M/BNC(75Ω)	Body Materials	BRASS/PTFE
Frequency range	DC-3GHz	Plating	GPLD/NICKEL
VSWR,Max	1.5	Durability	>500cycles
Insertion loss,Max	2.8dB	Temperature range	-40~+85°C
Voltage rating	170V(rms)	RoHS2002/95/EC	RoHS compliant
Dielectric withstanding voltage	250V	Cable retention force	>2lbs
Insulation resistance	1000MΩ	Min.bending radius repeated	14mm