


High Frequency Phase-stable Low Loss Coaxial Cable Series,  
High Frequency Cable Auxiliaries  
and High Frequency Test Cable Auxiliaries are broadly  
applied in aerospace industry,  
Electronic countermeasures system(ECM),  
high frequency anechoic system connection and 5G mobile  
communication, etc..

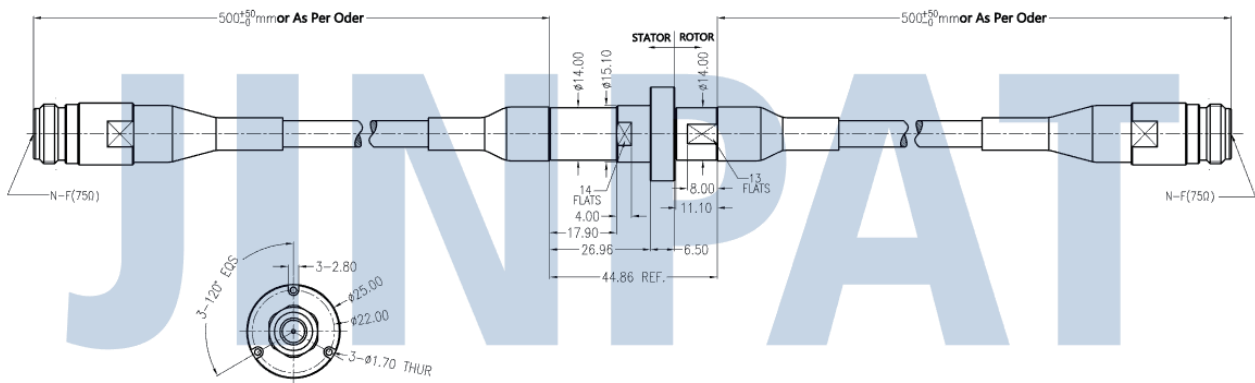

### Product specification

Interface Type	N-F/NM(75Ω)	Body Materials	BRASS/PTFE
Frequency range	DC-12GHz	Insulator Material	PTFE
VSWR,Max	1.3	Durability	>500cycles
Insertion loss,Max	1.0dB	Operation Temperature	-30~+75°C
Voltage rating	250V(rms)	Storage Temperature	-30~+75°C
Dielectric withstanding voltage	1000V	Humidity(Operation)	95%
Insulation resistance	5000MΩ	Humidity(Storage)	95%